



#### Camera wiring

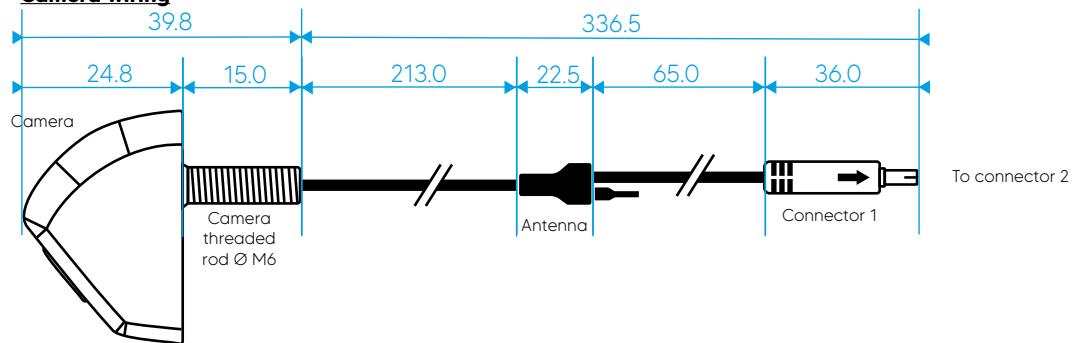


The position of the converter and filter capacitor can be adjusted along the cable to the desired length.

The antenna position can be adjusted along the camera wiring only, it cannot be placed along the power wiring to avoid performance loss.

#### Power wiring

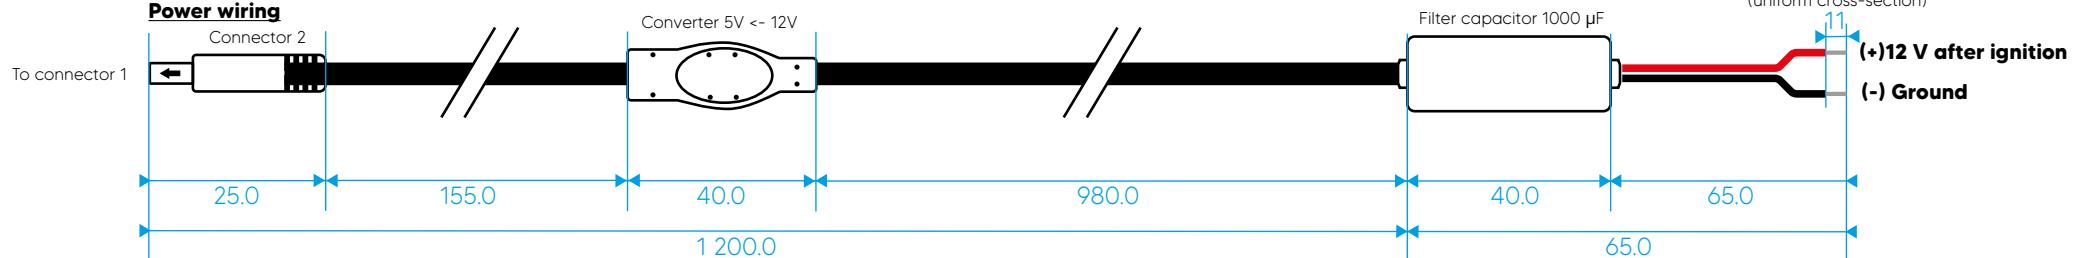


#### Accessories provided



Pad sticker \* 1



Spli nut M6 \* 1




Spli washer M6 \* 1



Positive angle spacer +10% \* 2



Negative angle spacer- 10% \* 2



Item ref H5WIFI : Beeper gift box + manual  
Item ref H5WIFI-CL : WHITE box + No manual

Dedicated Private WIFI APP  
JOYTRIP



GRADE	TOLERANCES (except as noted)			UNITS mm	PART DESCRIPTION: WIFI CAMERA + WH	SET DESCRIPTION: Wifi camera
	A	B	C			
0-10	$\pm 0.1$	$\pm 0.5$	$\pm 0.3$			
10-50	$\pm 0.5$	$\pm 2.0$	$\pm 0.45$			
50-100	$\pm 1.2$	$\pm 2.5$	$\pm 0.7$			
100-	$\pm 0.3$	$\pm 0.35$	$\pm 0.9$			
ANGULAR	$\pm 1^\circ$	$\pm 1^\circ$	$\pm 2^\circ$			
					DATE 15/05/2025	REV B

**Spacers**  
 . To place between car body and camera to adjust camera angle  
 . Material : PU + Silicone  
 . Positive angle : 10% or 5.7%  
 . Negative angle : -10% or -5.7%  
 . 2 x positive spacers  
 . 2 x negative spacers